

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
25 March 2004 (25.03.2004)

PCT

(10) International Publication Number  
**WO 2004/025027 A1**

- (51) International Patent Classification<sup>7</sup>: **D21H 21/18**
- (21) International Application Number:  
PCT/US2003/028704
- (22) International Filing Date:  
12 September 2003 (12.09.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
60/410,375 13 September 2002 (13.09.2002) US  
10/252,262 23 September 2002 (23.09.2002) US
- (71) Applicant: **UNIVERSITY OF PITTSBURGH [US/US]**;  
Cathedral of Learning, Pittsburgh, PA 15260 (US).
- (72) Inventors: **BECKMAN, Eric, J.**; 213 Tenth Street,  
Aspinwall, PA 15215 (US). **CARROLL, Eamon, W.**;  
1717 Lotus Drive, Orefield, PA 18069 (US). **CHAPMAN,**  
**Toby, M.**; 6527 Lilac Street, Pittsburgh, PA 15217 (US).  
**MINNICH, Kristen, E.**; 529 College Drive, Allentown,  
PA 18104 (US). **SAGL, Dennis**; 8734 Summit Circle,  
Fogelsville, PA 18051 (US). **GODDARD, Richard, J.**;  
8774 Summit Circle, Fogelsville, PA 18051 (US).
- (74) Agent: **BARTONY, Henry, E., Jr.**; Bartony & Hare, LLP,  
Suite 1801, Law & Finance Building, 429 Fourth Avenue,  
Pittsburgh, PA 15219 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,  
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,  
UG, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**  
— with international search report  
— before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendments
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*



WO 2004/025027 A1

(54) Title: COMPOSITION AND METHOD FOR INCREASING THE STRENGTH OF A CELLULOSIC PRODUCT

(57) Abstract: A composition includes water, cellulosic pulp, at least one hydrophilic polymer containing primary (-NH<sub>2</sub>) and/or secondary (-NHR) amine groups and at least one saccharide containing a reducible function. A method of increasing the strength of a cellulosic product includes the step of contacting a cellulosic pulp with a composition comprising (i) at least one hydrophilic polymer containing at least two groups which are independently the same or different a primary amine group or a secondary amine group and at least one saccharide containing a reducible function.

COMPOSITION AND METHOD FOR INCREASING THE STRENGTH  
OF A CELLULOSIC PRODUCT

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application claims the benefit of United States Provisional Patent Application Serial No. 60/410,375, filed September 13, 2002 and U.S. Patent Application Serial No. 10/252,262, filed September 23, 2002, the disclosure of which is incorporated herein by reference.

BACKGROUND OF THE INVENTION

[0002] The present invention relates generally to crosslinking compositions suitable to increase the strength (that is, wet and/or dry strength) of cellulosic products (including, for example, paper and other products made from cellulosic pulp) and to methods of increasing the strength of cellulosic products using such compositions.

[0003] For many years, the paper-making industry has sought ways of increasing the strength of paper. In that regard, papers fabricated without some additional means of reinforcement thereof can fall apart upon wetting or when subjected to mechanical stress in the dry state. Typically, a material is added to the wet pulp to improve the strength thereof during the formation of sheets prior to ultimate drying. Maintaining paper strength upon wetting is desirable in many applications, including bathroom tissue, paper towels, napkins, and the like. Moreover, additives which increase the strength of a wet paper often increase the dry strength of that paper. Increased dry strength is desirable, for example, in various packaging applications.

[0004] A number of wet- and dry-strength increasing additives are known in the art. However, such compositions typically include one or more components which are environmentally unfriendly or even toxic.

[0005] For example, some wet-strength additives are condensation products of urea and formaldehyde. Polyamine can be added to make such resins cationic. Other wet-strength additives include organochlorine crosslinked amidoamine compounds. A discussion of wet-

strength additives and their mechanisms is presented in "The 65 Mechanism of Wet-Strength Development in Paper: A Review," by Herbert H. ESPY, *Tappi Journal*, Vol. 78, No. 4, pages 90-97 (April 1995) as well as in "Chemistry of Paper Wet-Strength. I. A Survey of Mechanisms of WetStrength Development," by Lars WESTFELT, *Cellulose Chemistry and Technology*, Vol. 13, pages 813-825 (1979), the contents of which are incorporated by reference as though set forth in full herein.

[0006] Chemical compositions purported to increase paper wet strength while being chemically benign or environmentally friendly are set forth in U.S. Patent No. 6,146,497, which describes a composition including (a) a water-soluble polymeric material comprising at least one nucleophilic polymer, (b) a phenolic compound (phenols or polyphenols) and (c) a component (an oxidizing agent) capable of converting the phenolic compound into a quinone compound. Sugars in conjunction with their corresponding oxidases are contemplated as potential oxidizing agents for the phenolic component of the composition of U.S. Patent No. 6,146,497. Many phenolic compound, however, are environmentally undesirable. Moreover, many oxidizing agents are also environmentally undesirable (for example, potassium dichromate and potassium permanganate).

[0007] It thus remains desirable to develop improved, environmentally friendly compositions for increasing paper wet and/or dry strength.

#### SUMMARY OF THE INVENTION

[0008] In one aspect, the present invention provides a composition comprising at least one hydrophilic polymer containing primary ( $-NH_2$ ) and/or secondary ( $-NHR$ ) amine groups (that is, hydrophilic polymer contains or includes at least two groups which are independently the same or different a primary amine group or a secondary amine group) and at least one saccharide containing a reducible function. In general, the R substituent upon the secondary amine is not limited. Strong electron withdrawing groups are not preferred as such groups can reduce the nucleophilic nature of the secondary amine. In many cases, R is an alkyl group. The amine groups can be pendant groups on the polymer or incorporated into the polymer backbone. In general, the hydrophilic polymer must include at least two amine groups (per a polymer chain) to enable crosslinking.

[0009] Such an amine functional polymer/reducible saccharide combination has been found to undergo an unexpected cross-linking reaction upon the application of heat. The compositions of the present invention can, for example, be used as cross-linking agents in paper strengthening applications. The polymers used in the compositions of the present invention can be homopolymers and/or copolymers (which are polymerized from two or more dissimilar monomers) and the term "polymer" as used herein encompasses both homopolymers and copolymers.

[0010] Hydrogels have found use in the paper industry, for example, as absorbent materials. In that regard, hydrogels have been used as absorbent materials in diapers for a number of years. Surprisingly, the present inventors have discovered that the compositions of the present invention, which form hydrogels, can also be used to increase both the wet strength and dry strength of paper and other cellulosic products. While the hydrophilic polymers of the present invention form hydrogels with reducing sugars in aqueous solution, cross-linking can be controlled (for example, by control of temperature as described below) allowing application of the hydrophilic polymer and the saccharide to wet pulp (that is, paper or cellulosic fibers) and binding to the pulp prior to substantial cross-linking. Typically, a pre-formed hydrogel would not be able to effectively bind to cellulosic fibers as a result of its high viscosity.

[0011] Polymers suitable for use in the present invention include, but are not limited to, partially hydrolyzed poly(N-vinylformamide) (that is, a copolymer of NVF and vinylamine), partially hydrolyzed vinyl acetate/NVF copolymer (that is, a polymer with vinyl acetate, vinyl alcohol, NVF and vinylamine repeat units); hydrolyzed acrylonitrile/NVF copolymer; (available as a commercial product from Mitsubishi and containing acrylonitrile, acrylamide, amidine, NVF and vinylamine units), amine functional polyacrylamide (for example, prepared via Hoffman degradation of polyacrylamide), acrylic acid/vinylamine copolymer, maleic anhydride/maleic acid copolymers with NVF/vinylamine, NVF/vinylamine polymers with vinyl sulfonate comonomer units, allylamine/diallylamine polymers and copolymers, urea/formaldehyde and melamine/formaldehyde condensation polymers, amidoamine polymers (prepared from dicarboxylic acids and polyfunctional amines), amine/epichlorohydrin polymers, poly(ethyleneimine), and hydrolyzed or partially hydrolyzed poly(2-alkyl-2-oxazoline). One hydrophilic polymer or a mixture of two or more such polymers can be used in compositions of the present invention.

[0012] In general, polymers having a broad range of number average molecular weight (Mw) are suitable for use in the present invention. Preferably, the molecular weight of the polymers is at least approximately 500. More preferably, the molecular weight is in the range of approximately 30,000 to approximately 100,000. Polymers having molecular weight in excess of 100,000 can be used, but water solubility typically decreases for such polymers as molecular weight increases beyond approximately 100,000.

[0013] The reducible saccharides used in the present invention can be monosaccharides, disaccharides, trisaccharides etc, (for example, sugars) or polysaccharides (for example, starch or cellulose). Polysaccharides are typically a combination of nine or more monosaccharides. Reducible saccharides or reducing saccharides include a reducing group, function or functionality which is typically an aldehyde group (-C(O)H) or a hemiacetal group



which is another form of an aldehyde when the saccharide is in a cyclic conformation. Examples of reducing saccharides suitable for use in the present invention include, but are not limited to, the sugars glucose, lactose, and 2-deoxy-D-ribose. To decrease costs, the saccharide is preferably a monosaccharide (for example, glucose), a disaccharide (for example, lactose) or a polysaccharide (for example, starch).

[0014] The composition can, for example, further include a base. Examples of suitable bases include, but are not limited to, sodium hydroxide, potassium hydroxide, ammonia or calcium carbonate.

[0015] In one embodiment, the polymer is a copolymer of vinyl amine and vinyl alcohol. Preferably, the copolymer is at least 0.5% by weight of vinyl amine. More preferably, the copolymer is at least 3% by weight of vinyl amine. Even more preferably, the copolymer is at least 6% by weight of vinyl amine. Copolymers having well in excess of 6% by weight of vinyl amine are suitable for use in the present invention. In several embodiments for example, copolymer can be at least 12% by weight of vinyl amine.

[0016] A broad range of mole ratios of amine to reducing saccharide is suitable for use in the present invention. In one embodiment, the mole ratio of amine groups to reducing saccharide is in the range of approximately 1:4 to approximately 8:1. In general, increasing

amine content results in stiffening of the resultant gel. One skilled in the art can readily determine an appropriate amine content for a desired set of properties for the resultant gel.

[0017] In another aspect, the present invention provides a method of increasing the strength of a cellulosic product including the step of contacting a wet cellulosic pulp with a composition as described above. In one embodiment, wet cellulosic pulp (for example, wet paper pulp) and the composition are contacted at a temperature below approximately 50°C, or more typically, at room temperature or below (that is, at approximately 25°C or below) and subsequently heated to induce cross-linking. For example, the cellulosic pulp and the composition can be heated to a temperature of at least 50°, at least 70° or at least 90°.

[0018] In still another aspect, the present invention provides a composition formed from a mixture of water, cellulosic pulp, at least one hydrophilic polymer containing at least two groups which are independently the same or different a primary amine group or a secondary amine group and at least one saccharide containing a reducible function.

[0019] The compositions and methods of the present invention substantially increase both the wet and dry strength of paper and other cellulosic products. The compositions can also be used as, for example, strengthening additives in other materials. The compositions of the present invention can be added to the cellulosic fibers as individual components or as a pre-gel made by the partial reaction of the polymer(s) or copolymer(s) and the reducible saccharide component(s). No oxidizing agents, phenolic compounds, formaldehyde or organohalo compounds are required in the compositions and methods of the present invention. In general, no environmentally undesirable components are used in the compositions and methods of the present invention.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0020] Figure 1 illustrates a study of gel time at various temperatures for a composition including a copolymer of vinyl amine and vinyl alcohol (6 wt% vinyl amine) and D-glucose at a 1:1 sugar/copolymer ratio.

[0021] Figure 2 illustrates the effect of addition of base upon gel time.

[0022] Figure 3 illustrates a study of gel time at various sugar : copolymer ratios for a composition including a copolymer of vinyl amine and vinyl alcohol and D-glucose.

[0023] Figure 4 illustrates a study of gel time at various sugar.: copolymer ratios for a composition including a copolymer of vinyl amine and vinyl alcohol and lactose.

[0024] Figure 5 illustrates the viscosity of a composition including a copolymer of vinyl amine and vinyl alcohol (6 wt% vinyl amine) and D-glucose at a 1:1 sugar/copolymer ratio as a function of time.

[0025] Figure 6 sets forth a schematic representation of a Maillard reaction.

#### DETAILED DESCRIPTION OF THE INVENTION

[0026] As discussed above, during paper processing, material is added to the wet pulp to improve the strength during the formation of sheets prior to ultimate drying. Preferably, the additive material or composition exhibits a low viscosity during addition (to fully absorb into the pulp), then cures as temperature increases. Because paper comes into intimate contact with people, the strength-enhancing material is preferably relatively environmentally benign.

[0027] In the present invention, environmentally friendly or benign compositions are used to increase the wet strength (as well as the dry strength) of paper. When individual polymer chains interact, chemical or physical crosslinking may occur. This crosslinking results in a three-dimensional highly branched network of polymers.

[0028] When these networks become swollen with water they form hydrophilic gels, known as hydrogels. Hydrogels possess unique physical properties having attributes of both solids and liquids. Solid-like properties can be attributed to the strength of the crosslinked polymer networks. Whereas, fluid like properties result from the fact that the hydrogel is composed of, for example, over 80% water. The dual nature of their physical properties makes hydrogels particularly interesting and useful, in both industry and research.

[0029] The present inventors have discovered that water soluble polymers having primary and/or secondary amine groups form hydrogels in the presence of a reducing saccharide such as a reducing sugar. Reducing sugars are sometimes referred to herein simply as sugars.

[0030] Several examples of the present invention are described using compositions including polymers with vinyl amine repeat groups and at least one of several reducing

sugars. Vinyl amine homopolymer was found to form hydrogels in the presence of a reducing sugar. Moreover, copolymers of vinyl amine and at least one other monomer were also found to form hydrogels in the presence of a reducing sugar. In many instances, use of a copolymer of vinyl amine and at least one other monomer is preferable to use of a vinyl amine homopolymer in the present invention given the expense of the vinyl amine monomer. In a number of studies of the present invention, representative copolymers of vinyl amine and vinyl alcohol were used. Such copolymers are also sometimes referred to herein as poly(vinylalcohol)/ poly(vinylamine) or PVOH/PVAm copolymers.

[0031] Aqueous solutions of poly(vinylalcohol)/ poly(vinylamine) copolymer and a number of sugars were found to gel readily at temperatures between approximately 50 and 100°C. In a series of initial experiments, known amounts of sugars were mixed with a copolymer of vinyl amine and vinyl alcohol (12 wt % vinyl amine) to form a 40% solution (in water) by weight. The mixtures were heated to various temperatures and held for varying lengths of time. Gelation was determined to be the point where a Teflon stir bar ceased to move.

[0032] Vinyl amine is required for gelation to occur. In that regard, homopolymers of vinyl alcohol did not gel in the presence of sugar at elevated temperature. Homopolymers of vinyl amine or copolymers of vinyl amine and vinyl alcohol gelled readily under these conditions. Reducing saccharide (for example, sugar) is also required for gelation - vinyl amine homopolymers and copolymers of vinyl amine and vinyl alcohol did not gel without the presence of sugar. Gelation occurs over a wide range of amine : sugar (saccharide) ratios.

[0033] Gelation occurred in the presence of 2-deoxy-D-ribose, suggesting that the osazone mechanism was not responsible for crosslinking. On the other hand, gelation did not occur when using sucrose, suggesting that Maillard chemistry (known from food chemistry) is involved in the crosslinking and hence gelation. Prior studies suggest that no mutagenicity results from products of the Maillard reaction when disaccharides are employed. Lactose, for example, allows for gelation in the compositions and systems of the present invention. Although it is believed that the Maillard chemistry is involved in gelation in the compositions of the present invention, the present invention is not limited to any particular mechanism of gelation.



[0034] Increasing temperature increases the rate of the reaction/gelation. In several experiments with a 12% (wt) amine sample, for example, the time for gelation dropped with increasing temperature from 335 minutes (50°C) to 113 minutes (60°C) to 50 minutes (70°C) to 24 minutes (80°C) to less than 10 minutes at (90°C). Figure 1 illustrates graphically the effect of increasing temperature on gel time for a copolymer of vinyl amine and vinyl alcohol having 6% (wt) vinyl amine. Addition of acid (for example,  $H_2SO_4$ ) slowed the gelation reaction, while addition of a base (for example, NaOH) accelerated the gelation reaction (see Figure 2).

[0035] Figures 3 and 4 illustrate studies of the effect of mole ratio of sugar to copolymer (6% by weight amine) for D-glucose and lactose, respectively. In general, sugar concentration only slightly effected gel time. Moreover, the type of sugar used did not greatly affect gelation time. Lactose was found to be slightly better than D-glucose in these studies.

[0036] A number of experiments were performed to explore the ability of the gel to strengthen wet paper, as summarized below. The PVOH/PVAm:glucose 2:1 sample clearly showed improved wet strength over PVOH/PVAm without sugar and is substantially superior to the control paper and to glucose coated paper. These results demonstrate the effectiveness of the compositions of the present invention in improve the wet strength and the dry strength of paper. The temperature dependence of the rate of cross-linking of the compositions of the present invention allows time to apply the relatively low-viscosity mixtures of hydrophilic polymer and reducing saccharide of the present invention to pulp fibers, with strength properties developing in the finished sheet. Dehydration readily occurs in the paper sheet upon drying to form a strengthening cross-linked matrix.

[0037] In the experiments of Tables 1 and 2, a sample of PVOH/PVAm (12 wt% vinyl amine; medium molecular weight) was dissolved at 4 wt% in distilled water. A sample of glucose was also dissolved at 4 wt% in distilled water. These samples were applied to Whatman #4 filter paper to provide even coverage.

[0038] Table 1. Dry Result

Sample Description	Coat Weight (weight of coating/weight of paper)	Dry Strength (lbs)
Control Paper	0	5.43
PVOH/PVAm	0.124	15.3
Glucose	0.137	4.1
PVOH/PVAm:glucose 2:1	0.118	11.7

[0039] Table 2. Wet Results

Sample Description	Coat Weight (weight of coating/weight of paper)	Wet Strength (lbs.)
Control Paper	0	0.095
PVOH/PVAm	0.085	0.81
Glucose	0.134	0.128
PVOH/PVAm:glucose	0.081	3.26

## [0040] Experimental

[0041] **Materials.** All chemicals were used without further purification. Poly(vinylalcohol) (98-99%,  $M_w$  31,000-50,000), D-glucose (A.C.S. reagent) and 2-deoxy-D-ribose (97%) were purchased from Aldrich Chemical Co. Sucrose (A.C.S. reagent) was purchased from J.T. Baker Chemical. Lactose (A.C.S. reagent) was purchased from E.M. Science. L-ribose (99.5%) was purchased from Acros Organics. The poly(vinylalcohol)/poly(vinylamine) copolymers (6 and 12% amine, medium  $M_w$ ) were donated by Air Products.

[0042] **Instrumentation.** Infrared spectra (IR) were obtained on an ATI Mattson FTIR spectrometer. Information obtained was used to determine chemical changes occurring during gelation.

[0043] **Synthesis of poly(vinylamine).** Poly(vinylamine) was synthesized using N-vinyl formamide (NVF). First poly(vinylformamide) (PNVF) was made by combining 100mL of the NVF monomer, 40 mL of DMSO solvent, 61 mg Vazo 88 initiator (cyclohexane carbonitrile), and .5 g RAFT agent in a three-neck flask. The mixture was then heated at 100°C for ~2 hours under nitrogen gas with constant stirring and with reflux conditions. After heating, the product was diluted in a 50mL/50mL water/ethanol mixture. The product was then precipitated out of solution using acetone. Product was dried overnight in a vacuum oven, redissolved in a 120mL/50mL water/ethanol mixture and subsequently

precipitated using acetone. The PNVF was hydrolyzed under basic conditions by combining the polymer, concentrated NaOH (5% excess) and distilled deionized water in a round bottom flask. The mixture was then heated at 80°C for 18 hours, under reflux conditions and with constant stirring. Adding HCl to the cold product solution precipitated the product. The product was then washed with methanol three times and dried in a vacuum oven. HCl was removed by adding aqueous NaOH. This product was precipitated in acetone, dried and then washed with butanol.

#### [0044] Examples

[0045] **Example 1.** An aqueous solution was prepared by dissolving 7.5 g D-glucose and 2.5 g poly(vinylalcohol) (PVOH) into distilled, deionized water in a 25 mL volumetric flask. The solution was clear with some undissolved polymer. It was, however, pourable. The solution was transferred to a round bottom flask and heated to 80°C in an oil bath. Heating was done with constant stirring and under reflux conditions. Upon completion the solution remained clear with all polymer dissolved and was still pourable.

[0046] **Example 2.** Prior studies suggest that an aqueous solution of PVOH and D-glucose could be used to form hydrogels by using freezing/thawing cycles. See Yamaura, K.; Fukada, M.; Tanaka, T.; Tanigami, T. *J. of Applied Polymer Science*. 1999, 74, 1298-1303. To study this effect, a solution was prepared as in example 1. Heating was carried out using the same procedure as in example 1, but was allowed to reach a temperature of 90°C. The aqueous solution was then placed in a -10°C freezer over 48 hours. After thawing the solution at room temperature for 1 hour a weak, white hydrogel had formed. The gel was then placed back in the freezer for 24 hours and then thawed at room temperature for 1 hour. After which, the gel appeared visibly stronger. This gel was found to be soluble in water heated up to 49°C. Neither swelling nor dissolution was noted when placed in 1M HCl.

[0047] **Example 3.** Prior studies further suggest that D-glucose was not necessary for the gelation of poly(vinylalcohol) using the process in example 2. See Yamaura, K.; Karasawa, K.I.; Tanigami, T.; Matsuzawa, S. *J. of Applied Polymer Science*. 1994, 51, 2041-2046. To study such gelation, a 2.5g of PVOH was dissolved in distilled, deionized water in a 25 mL volumetric flask. Heating was carried out using the same procedure as in example 1, but was allowed to reach a temperature of 95°C. The solution was then placed in the freezer at -25°C for 48 hours. After 1 hour of thawing at room temperature a gel, similar in

appearance to the gel in Example 2, was produced. The inability of PVOH to form hydrogels without the freezing/thawing cycle indicated that the amine groups on copolymers of PVOH and Poly(vinylamine) in the compositions of the present invention are responsible for gelation.

[0048] **Example 4.** Poly(vinylamine) (PVA) was also used in trying to make gels. An excess of PVA was used in the case that some butanol was still present in the synthesized polymer. 2.8 g of PVA was dissolved in distilled, deionized water in 25 mL volumetric glassware leaving room for the addition of D-glucose and more water. A heating gun was used, as needed, to dissolve polymer. D-glucose was dissolved in some water in a separate container, added to the other solution and diluted as necessary. This solution was orange in color and pourable. Heating was carried out using the same procedure as in example 1, but was allowed to reach a temperature of 100°C. A rubbery, dark brown gel began to appear at ~95°C. This gel swelled when exposed to both excess water and 1M HCl.

[0049] **Example 5.** To ensure that the discoloration observed in Example 4 was a result of gelation and not merely oxidation of the amine, Example 4 was repeated under nitrogen gas. This was done using a three neck flask, rubber septum and needle. The rubbery, dark brown gel appeared at ~93°C again. This gel was slightly lighter in color than the gel of Example 5. This gel swelled in water and in 1M HCl.

[0050] **Example 6.** To study whether a sugar was necessary for gelation, 1.25 g of PVA was dissolved in water in a 25 mL volumetric flask. This solution was then heated to 95°C using the procedure of Example 1. No gelation was observed.

[0051] **Example 7.** The poly(vinylalcohol)/poly(vinylamine) copolymer that was used for the experiments set forth in Examples 7 through 24 contained 12% amine groups. 2.5g of the copolymer followed by 7.5 g of D-glucose were dissolved in distilled deionized water using the procedure outlined in Example 4. This solution was then transferred to a three-neck flask and heated in an oil bath to 100°C. Heating was carried out under reflux conditions, with constant stirring and under argon gas. A strong, bright yellow gel appeared at ~90°C. This gel swelled when exposed to excess water and to 1M HCl.

[0052] **Example 8.** The procedure in example 7 was repeated using 2.5 g D-glucose. This is a 1:2 mole ratio of amine groups to sugar molecules. Gelation began to occur at ~90°C. This gel was strong and yellow. It swelled in water and 1M HCl.

[0053] **Example 9.** The procedure of Example 7 was repeated using 1.25 g D-glucose (a 1:1 mole ratio of amine groups to sugar molecules). Gelation began to occur at ~90°C. This gel was a pale yellow color. This gel is still strong but not as strong as the previous two examples. Swelling was noted in water and 1M HCl. IR spectra were taken of the aqueous solution before heating and of this gel afterwards. Before heating a strong peak was seen around  $1680\text{ cm}^{-1}$ , which is typical of a primary amine peak. After heating this peak became much smaller, more typical of a secondary amine. Another unidentified peak appeared after heating at  $\sim 1090\text{ cm}^{-1}$ .

[0054] **Example 10.** The procedure of Example 7 was repeated using 0.61 g D-glucose (a 2:1 mole ratio of amine groups to sugar molecules). Gelation began to occur at ~95°C. This gel was strong yet somewhat sticky and a clear yellow color. Swelling was noted when exposed to water and to 1M HCl.

[0055] **Example 11.** The procedure of Example 7 was repeated using 0.31 g D-glucose (a 4:1 mole ratio of amine groups to sugar molecules). Gelation began to occur at ~100°C. The gel produced was sticky and almost clear in color. This gel swelled when exposed to excess water and to 1M HCl.

[0056] **Example 12.** The procedure of Example 7 was repeated using 0.16 g D-glucose (a 8:1 mole ratio of amine groups to sugar molecules). Gelation began to occur at ~100°C. This gel was sticky and clear. Swelling occurred when exposed to water and to 1M HCl.

[0057] **Example 13.** To test for the possibility of an osazone mechanism L-ribose was used instead of D-glucose. The procedure followed was similar to that of example 9 (using a 1:1 mole ratio and the same conditions). 1.02g of L-ribose was used. Gelation occurred at ~85°C. This gel was strong, sticky and bright orange in color. This gel swelled when exposed to excess water and to 1M HCl.

[0058] **Example 14.** As part of the aforementioned test of reaction mechanism 2-deoxy-D-ribose was also used instead of D-glucose. The procedure of Example 9 was once

again followed, this time using 0.91g of 2-deoxy-D-ribose. Gelation occurred at ~85°C. This gel was also strong and bright orange. The gelation of 2-deoxy-D-ribose indicates that the osazone reaction is not taking place since it would be unable to occur as a result of the structure of this sugar. Without limitation to any particular reaction mechanism in the present invention, a Maillard reaction mechanism is thus indicated. The gel of this example swelled when exposed to excess water and to 1M HCl.

[0059] **Example 15.** Prior studies show that little or no mutagenicity results from the Maillard reaction when disaccharides, such as lactose, are involved. See, for example, Brands, C.M.J.; Alink, G.M.; vanBoekel, M.A.J.S.; Jongen, W.M.F. *J.Agric. Food Chem.* 2000, 48, 2271-2275. A summary of the Maillard reaction is provided in Figure 6. Thus lactose is a good sugar for use in the present invention. The procedure of Example 9 was used, with 2.45g of lactose. A strong, orange gel formed at ~100°C. Solubility tests were not carried out on this gel.

[0060] **Example 16.** Sucrose is a disaccharide lacking active carbonyl groups. Therefore, sucrose would not be able to form a gel via the Maillard reaction. See Baynes, J.W.; Monnier, V.M. "The Maillard Reaction in Aging, Diabetes and Nutrition" 1989; and O'Brien, J.; Nursten, H. E.; Crabbe, M.J.C.; Ames, J.M. "The Maillard Reaction in Foods and Medicine" 1998. The procedure from example 9 was once again repeated. In this example, time 2.33g of sucrose was used. The temperature was taken up to 115°C and gelation was not observed.

[0061] **Example 17.** Constant temperature experiments were also carried out. 2.5g of copolymer followed by 1.25g of D-glucose were dissolved in water using a 25 mL volumetric flask as outlined in Example 4. Heating took place in an oil bath that was maintained at a constant temperature of 80°C. Heating was done under reflux conditions, under argon gas and with constant stirring. Gelation time was noted as the time when the gel became too viscous for the stir bar to move. In this example gelation time was found to be 23.5 minutes. The gel produced was a clear yellow and sticky. This gel dissolved in water.

[0062] **Example 18.** The procedure of Example 17 was repeated using an oil bath at 70°C. Gelation time was noted as 49.5 minutes. This gel was weaker and stickier than the previous one. This gel also dissolved in water.

[0063] **Example 19.** The procedure of Example 17 was repeated using an oil bath at 60°C. Gelation time was noted as 113.25 minutes. This gel was weaker and stickier than the previous one. This gel also dissolved in water.

[0064] **Example 20.** The procedure of Example 17 was repeated using an oil bath at 50°C. Gelation time was noted as 335.0 minutes. This gel was weaker and stickier than the previous one. This gel also dissolved in water.

[0065] **Example 21.** To test the effect of pH on gelation, the procedure of Example 17 was repeated under acidic conditions. Three drops of concentrated H<sub>2</sub>SO<sub>4</sub> were added to the aqueous solution. After 120.0 minutes the solution had turned slightly yellow and appeared to be a pourable gel. This gel was also soluble in water.

[0066] **Example 22.** Basic conditions were also examined using the procedure in example 17. 0.04g of concentrated NaOH were added to the aqueous solution. Gelation was noted after 18.2 minutes. This gel was similar in appearance to that produced in Example 17. This gel was slightly soluble in excess water.

[0067] **Example 23.** The gels studied in Figures 1 through 5 were synthesized in a consistent manner. In that regard, 21.25 grams of copolymer was weighed out into a beaker and set aside for both 6 wt% and 12 wt% amine copolymers. The sugar was also weighed out in a beaker and set aside. The amount of sugar added depended on the mole ratio of sugar to amine, which is indicated in Table 3 below for each ratio.

[0068] **Table 3**

<u>Molar Ratio (sugar: amine)</u> <u>And Type of Sugar</u>	<u>Amount of Sugar (grams)</u>
1:1 glucose	5.23
2:1 glucose	10.46
4:1 glucose	20.92
1:2 lactose	5.23
1:1 lactose	10.46
2:1 lactose	20.92

The saccharide (sugar):amine ratios set forth in Table 3 and Figures 3 and 4 are merely the reciprocal of amine:sugar mole ratios.

[0069] Deionized water was measured out in a tall form beaker to approximately 425 mL. A small amount (~1/4) of this water was put into another tall form beaker and the sugar was added and mixed thoroughly. The bulk of the water was used to mix with the copolymer. The mixture of copolymer/water was then put into an oil bath and mixed to allow the copolymer to dissolve. Next, the sugar/water mixture was added into the copolymer mixture and the time was started. The UL adapter was then lowered into the mixture and the Brookfield viscometer was turned on to a speed of 60 (The Brookfield viscometer had been earlier calibrated with water). The readings from the Brookfield were not recorded until after the time had reached 9 minutes to allow the UL adapter to settle. The time was then recorded after each minute. The only other change in procedure occurred when the NaOH was added [50% (w/w) NaOH in water solution]. 31mM of NaOH (or 1 gram of the NaOH in water solution) was added into the sugar/water mixture before adding it to the copolymer mixture.

[0070] **Example 24.** In several studies of the effect of the compositions of the present invention upon wet and dry strength of paper, a sample of PVOH/PVAm (12 wt%VAm; medium molecular weight) was dissolved at 4 wt% in distilled water. A sample of glucose was also dissolved at 4 wt% in distilled water. These samples were applied to Whatman #4 filter paper from a 6" roll using a wire wound rod (RDS40) to provide even coverage. 50 grams of the 4 wt% solution of PVOH/PVAm were mixed with 25 grams of the 4 wt% solution of glucose and also coated on the above noted filter paper using a wire wound rod to provide even coverage. The samples were placed in an air circulating oven for 10 minutes at 100 °C. The samples were removed and conditioned at 23 °C; 50% RH for 16 hours prior to testing. 1" wide strips were cut transverse to the filter paper roll direction and cut into two 3" long specimens for dry tensile testing. Samples were also cut into 3" long specimens and immersed in water for 30 seconds and tested for wet tensile strength. The results are set forth in Table 1 and 2 above. The sample weights were measured to determine coat weights (amount of additive on the coated paper versus the uncoated paper). Data on an average of four specimens is set forth in Tables 1 and 2. The testing rate was 2 in./min. strain rate (2 in. gage length).

[0071] The foregoing description and accompanying drawings set forth preferred embodiments of the invention at the present time. Various modifications, additions and alternative designs will, of course, become apparent to those skilled in the art in light of the foregoing teachings without departing from the scope of the invention. The scope of the



invention is indicated by the following claims rather than by the foregoing description. All changes and variations that fall within the meaning and range of equivalency of the claims are to be embraced within their scope.

## WHAT IS CLAIMED IS:

1. A composition comprising: water; cellulosic pulp, at least one hydrophilic polymer containing at least two groups which are independently the same or different a primary amine group or a secondary amine group and at least one saccharide containing a reducible function.
2. The composition of claim 1 wherein the reducing saccharide is a monosaccharide, a disaccharide or a polysaccharide.
3. The composition of claim 1 wherein the polymer is partially hydrolyzed poly(N-vinylformamide), partially hydrolyzed vinyl acetate/ N-vinylformamide copolymer, hydrolyzed acrylonitrile/ N-vinylformamide copolymer, amine functional polyacrylamide, acrylic acid/vinylamine copolymer, maleic anhydride/maleic acid copolymers with N-vinylformamide/vinylamine, N-vinylformamide /vinylamine polymers with vinyl sulfonate comonomer units, allylamine polymer, diallylamine polymer, allylamine/diallylamine copolymer, urea/formaldehyde condensation polymers, melamine/formaldehyde condensation polymers, amidoamine polymers, amine/epichlorohydrin polymers, poly(ethyleneimine), hydrolyzed poly(2-alkyl-2-oxazoline) or partially hydrolyzed poly(2-alkyl-2-oxazoline).
4. The composition of claim 1 wherein the polymer is a copolymer of vinyl amine and vinyl alcohol.
5. The composition of claim 4 wherein the copolymer is at least 0.5% by weight of vinyl amine.
6. The composition of claim 4 wherein the copolymer is at least 3% by weight of vinyl amine.
7. The composition of claim 4 wherein the copolymer is at least 6% by weight of vinyl amine.
8. The composition of claim 4 wherein the copolymer is at least 12% by weight of vinyl amine.

9. The composition of claim 4 wherein the mole ratio of amine to reducing saccharide is in the range of approximately 1:4 to approximately 8:1.
10. The composition of claim 1 further comprising a base.
11. The composition of claim 10 wherein the base is sodium hydroxide, potassium hydroxide, ammonia or calcium carbonate.
12. The composition of claim 1 wherein the saccharide is at least one of glucose, lactose, or 2-deoxy-D-ribose
13. The composition of claim 1 wherein the water, the cellulosic pulp, the hydrophilic polymer and the reducing saccharide are contacted at approximately a temperature of approximately 25°C or below and subsequently heated to induce crosslinking of the hydrophilic polymer and the reducing saccharide.
14. A method of increasing the strength of a cellulosic pulp product comprising the step of contacting wet cellulosic pulp with a composition comprising (i) at least one hydrophilic polymer containing at least two groups which are independently the same or different a primary amine group or a secondary amine group and at least one saccharide containing a reducible function.
15. The method of claim 14 wherein the reducing saccharide is a monosaccharide, a disaccharide or a polysaccharide.
16. The method of claim 14 wherein the polymer is partially hydrolyzed poly(N-vinylformamide), partially hydrolyzed vinyl acetate/ N-vinylformamide copolymer, hydrolyzed acrylonitrile/ N-vinylformamide copolymer, amine functional polyacrylamide, acrylic acid/vinylamine copolymer, maleic anhydride/maleic acid copolymers with N-vinylformamide/vinylamine, N-vinylformamide /vinylamine polymers with vinyl sulfonate comonomer units, allylamine polymer, diallylamine polymer, allylamine/diallylamine copolymer, urea/formaldehyde condensation polymers, melamine/formaldehyde condensation polymers, amidoamine polymers, amine/epichlorohydrin polymers, poly(ethyleneimine), hydrolyzed poly(2-alkyl-2-oxazoline) or partially hydrolyzed poly(2-alkyl-2-oxazoline).

17. The method of claim 14 wherein the polymer is a copolymer of vinyl amine and at least one other monomer.
18. The method of claim 17 wherein the copolymer is at least .5% by weight of vinyl amine.
19. The method of claim 17 wherein the copolymer is at least 3% by weight of vinyl amine.
20. The method of claim 17 wherein the copolymer is at least 6% by weight of vinyl amine.
21. The method of claim 17 wherein the copolymer is at least 12% by weight of vinyl amine.
22. The method of claim 17 wherein the mole ratio of amine to reducing saccharide is in the range of approximately 1:4 to approximately 8:1.
23. The method of claim 14 wherein the cellulosic pulp is contacted with the composition in the presence of a base.
24. The method of claim 23 wherein the base is sodium hydroxide, potassium hydroxide, ammonia or calcium carbonate.
25. (Original) The method of claim 14 wherein the saccharide is at least one of glucose, lactose, or 2-deoxy-D-ribose.
26. The method of claim 14 wherein wet cellulosic pulp and the composition are contacted at room temperature or below and subsequently heated to induce crosslinking.
27. The method of claim 26 wherein the cellulosic pulp and the composition are heated to a temperature of at least 50°C.
28. The method of claim 26 wherein the cellulosic pulp and the composition are heated to a temperature of at least 70°C.
29. The method of claim 26 wherein the cellulosic pulp and the composition are heated to a temperature of at least 90°C.

30. The method of claim 29 wherein the composition is heated to a temperature of at least 50°C.

31. The method of claim 26 wherein the composition is heated to a temperature of at least 70°C.

32. The method of claim 26 wherein composition is heated to a temperature of at least 90°C.

33. The method of claim 26, further including the step of drying the wet cellulosic pulp.

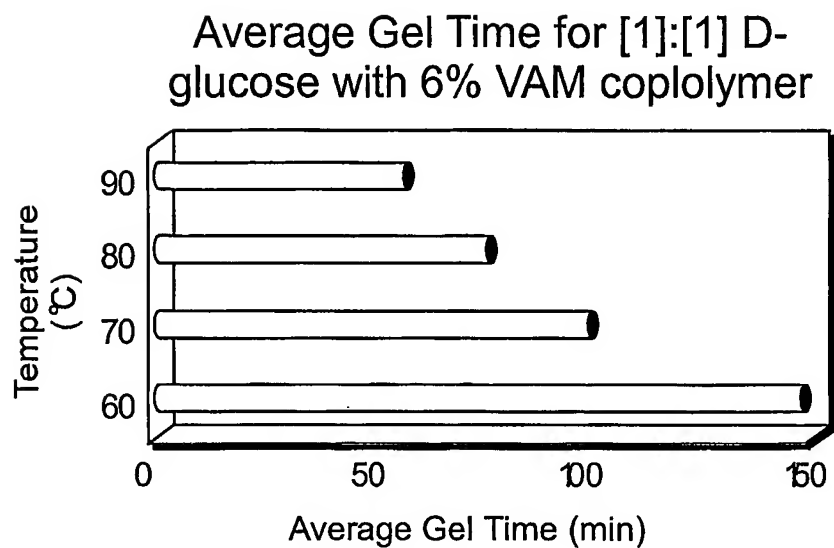


FIG. 1

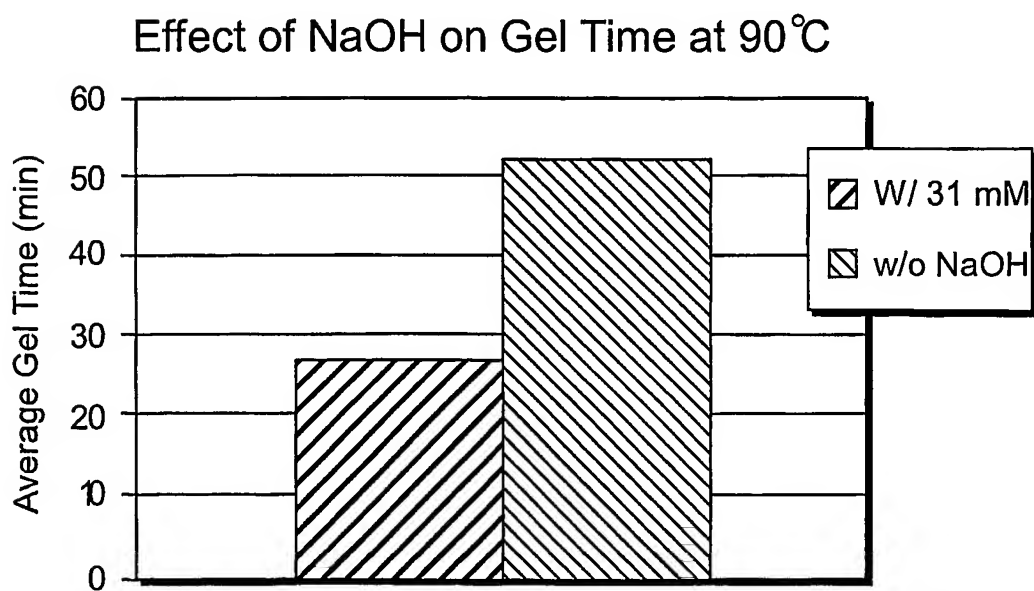


FIG. 2

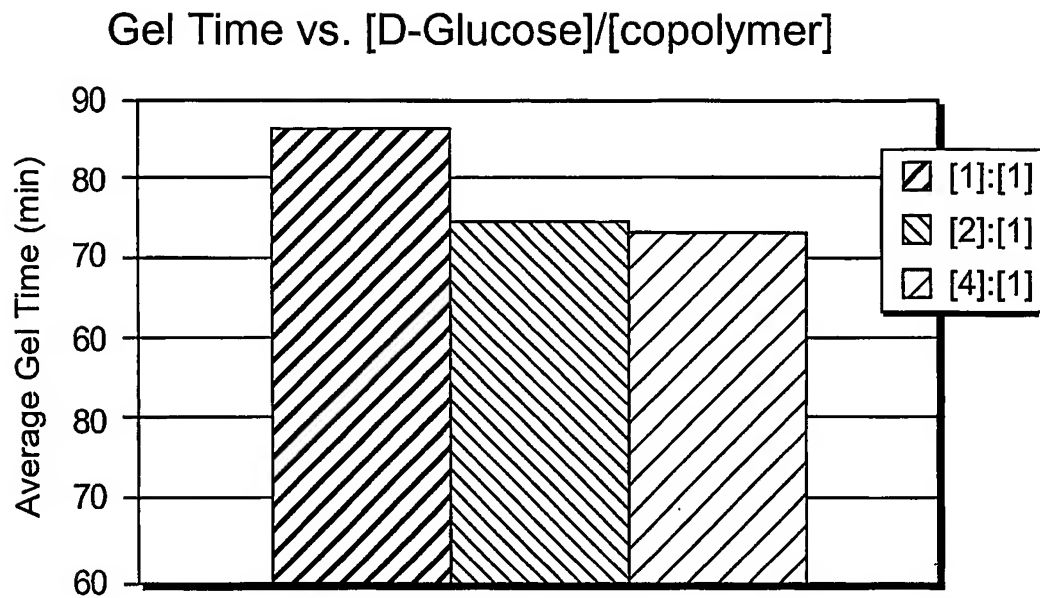


FIG. 3

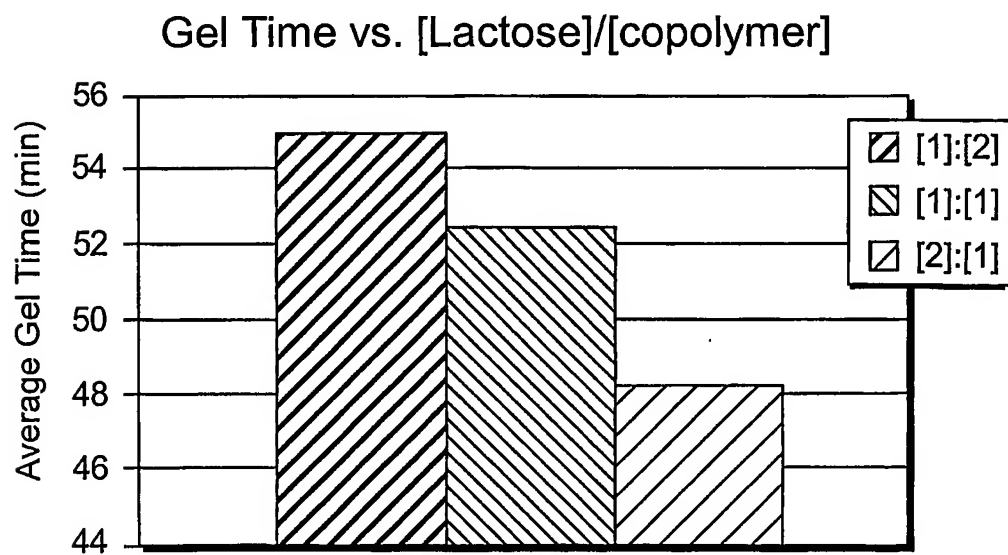


FIG. 4

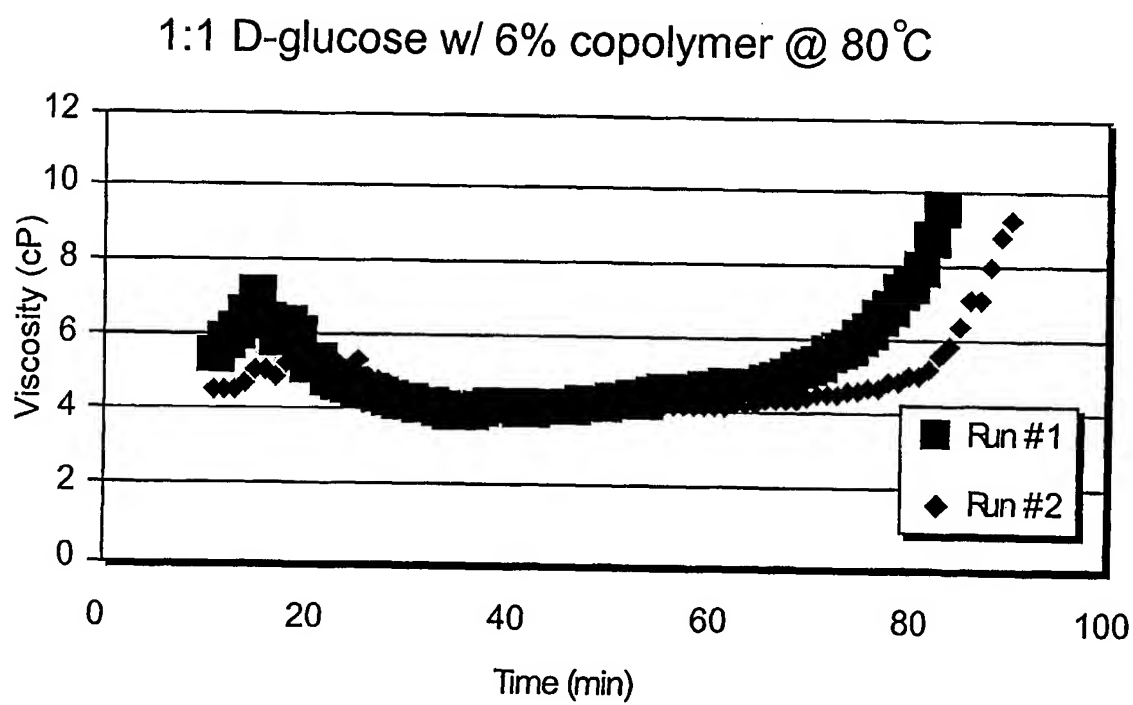


FIG. 5



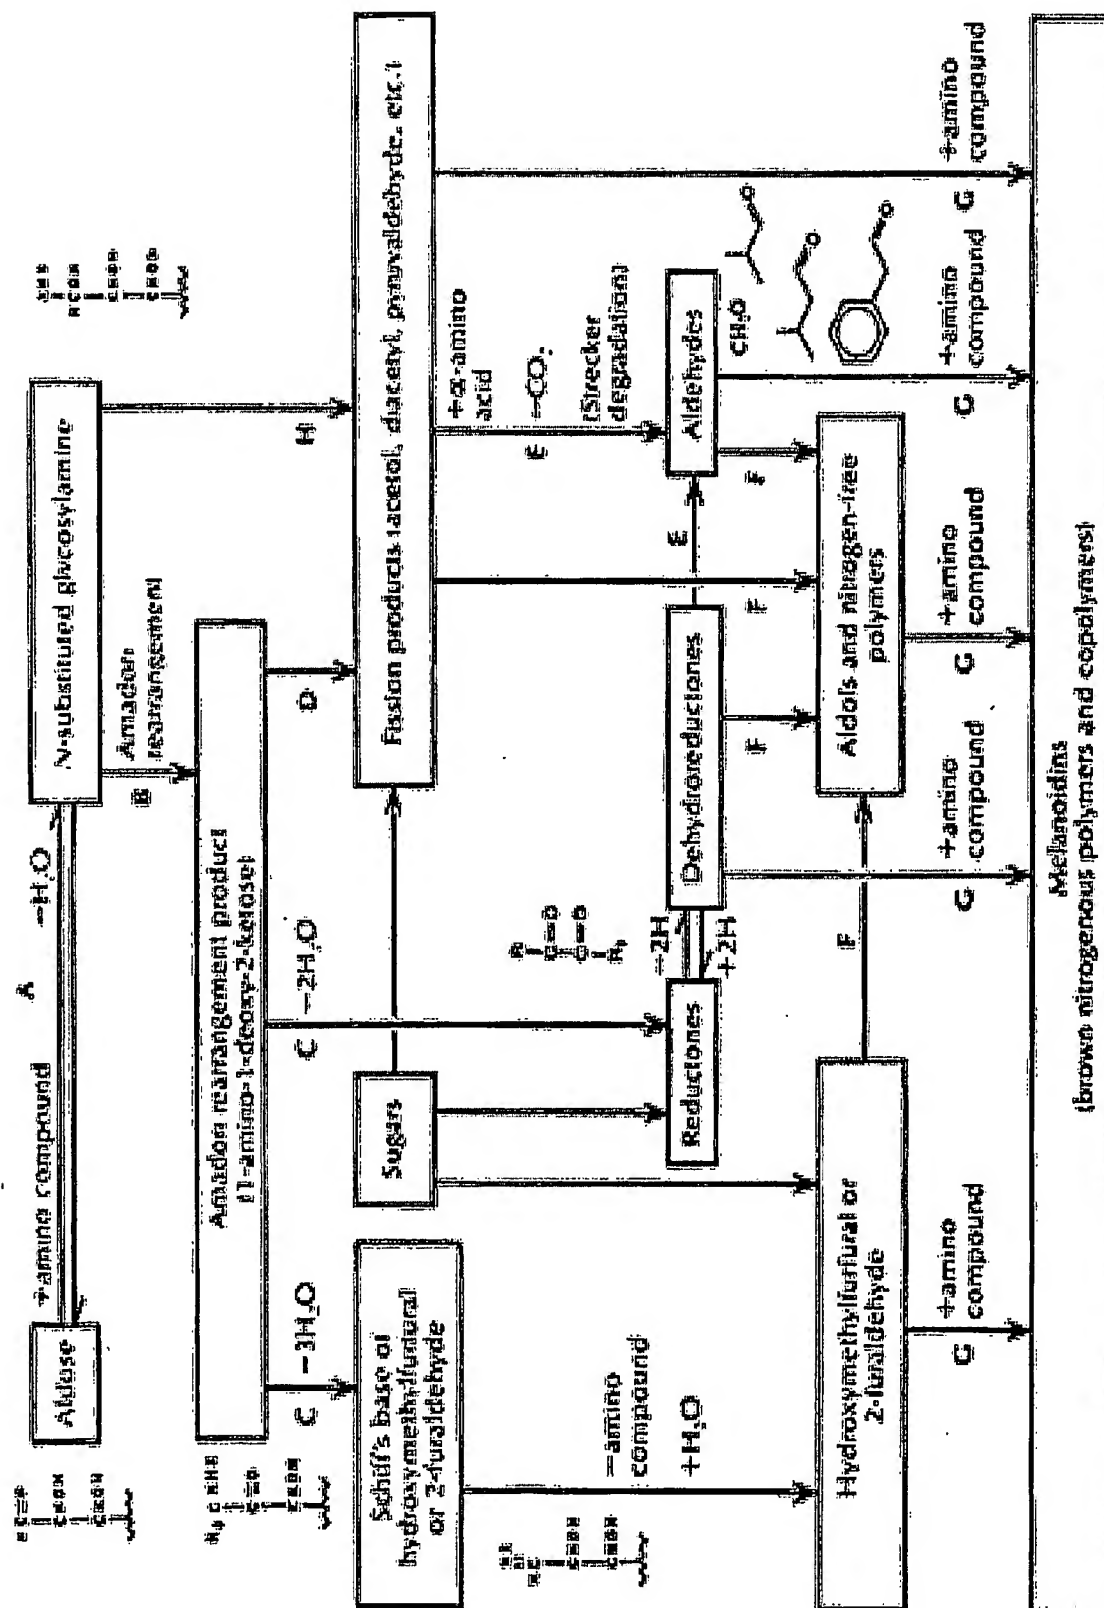


Fig. 6

# INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 03/28704

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 D21H21/18

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 D21H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 98 45536 A (DYLLICK BRENZINGER RAINER ; BASF AG (DE); BAUMANN PETER (DE); KRUEG) 15 October 1998 (1998-10-15) claims 1-12; examples 1-11	1-4, 12, 14-17, 25, 33
X	US 6 179 962 B1 (BRADY RICHARD LEE ET AL) 30 January 2001 (2001-01-30) claims 1-70	1-4, 14-16, 33
X	US 4 940 514 A (HARTMANN HEINRICH ET AL) 10 July 1990 (1990-07-10) claims 1-6; examples 1-12	1-3, 14-16, 33
X	WO 01 29313 A (WEYERHAEUSER CO) 26 April 2001 (2001-04-26) claims 1-55	1-3, 14-16, 33
	-/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the international search

27 January 2004

Date of mailing of the international search report

03/02/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel: (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Karlsson, L

# INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 03/28704

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 851 300 A (HARTMANN HEINRICH ET AL) 22 December 1998 (1998-12-22) claims 1-8; examples 1-24 ----	1-3, 14-16, 33
A	GB 1 259 533 A (NALCO CHEMICAL COMPANY) 5 January 1972 (1972-01-05) the whole document ----	1-33
A	US 5 281 307 A (CARROLL WILLIAM E ET AL) 25 January 1994 (1994-01-25) the whole document ----	1-33
A	US 5 846 788 A (PEDERSEN LARS SAABY ET AL) 8 December 1998 (1998-12-08) the whole document -----	1-33

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No.

PCT/US 03/28704

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9845536	A	15-10-1998	DE 19713755 A1	08-10-1998
			AU 730063 B2	22-02-2001
			AU 7427598 A	30-10-1998
			WO 9845536 A1	15-10-1998
			EP 0972110 A1	19-01-2000
			JP 2001518988 T	16-10-2001
			NZ 338029 A	28-04-2000
			US 6616807 B1	09-09-2003
			ZA 9802842 A	20-01-1999
US 6179962	B1	30-01-2001	AU 741549 B2	06-12-2001
			AU 2013699 A	19-07-1999
			BR 9814566 A	10-10-2000
			CA 2314368 A1	08-07-1999
			CN 1285888 T	28-02-2001
			EP 1047833 A1	02-11-2000
			ID 25538 A	12-10-2000
			JP 2002500287 T	08-01-2002
			TW 444081 B	01-07-2001
			WO 9934058 A1	08-07-1999
			ZA 9900017 A	30-06-1999
US 4940514	A	10-07-1990	DE 3724646 A1	02-02-1989
			AT 67538 T	15-10-1991
			AU 593422 B2	08-02-1990
			AU 1929488 A	27-01-1989
			CA 1302021 C	02-06-1992
			DE 3864938 D1	24-10-1991
			DK 170826 B1	29-01-1996
			DK 407888 A	26-01-1989
			EP 0301372 A1	01-02-1989
			FI 883504 A ,B,	26-01-1989
			JP 1040694 A	10-02-1989
			JP 2596593 B2	02-04-1997
			NO 883274 A ,B,	26-01-1989
			NZ 225536 A	27-09-1989
WO 0129313	A	26-04-2001	AU 7122100 A	30-04-2001
			CA 2386403 A1	26-04-2001
			CN 1377436 T	30-10-2002
			JP 2003512541 T	02-04-2003
			SE 521309 C2	21-10-2003
			SE 0201183 A	19-06-2002
			WO 0129313 A1	26-04-2001
			US 2002139501 A1	03-10-2002
US 5851300	A	22-12-1998	DE 4438708 A1	02-05-1996
			AT 169032 T	15-08-1998
			AU 690752 B2	30-04-1998
			AU 3746495 A	23-05-1996
			CA 2203931 A1	09-05-1996
			DE 59503014 D1	03-09-1998
			DK 788516 T3	01-02-1999
			WO 9613525 A1	09-05-1996
			EP 0788516 A1	13-08-1997
			ES 2119491 T3	01-10-1998
			FI 971832 A	24-06-1997
			JP 10507790 T	28-07-1998

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Publication No

PCT/US 03/28704

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5851300	A		NZ 294616 A	25-02-1999
GB 1259533	A	05-01-1972	AU 5818669 A DE 1938015 A1 FR 2054739 A5	21-01-1971 11-02-1971 07-05-1971
US 5281307	A	25-01-1994	CA 2112949 A1 DE 69404680 D1 DE 69404680 T2 EP 0606889 A1 FI 940120 A JP 6235191 A NO 940071 A	14-07-1994 11-09-1997 18-12-1997 20-07-1994 14-07-1994 23-08-1994 14-07-1994
US 5846788	A	08-12-1998	AT 201463 T AU 3074695 A DE 69521048 D1 DE 69521048 T2 WO 9603546 A1 EP 0772717 A1 ES 2158951 T3 JP 10506438 T PT 772717 T	15-06-2001 22-02-1996 28-06-2001 24-01-2002 08-02-1996 14-05-1997 16-09-2001 23-06-1998 30-11-2001